


BELLATRİX

LINEER SARKIT ARMATÜR
LINEAR PENDANT FIXTURE

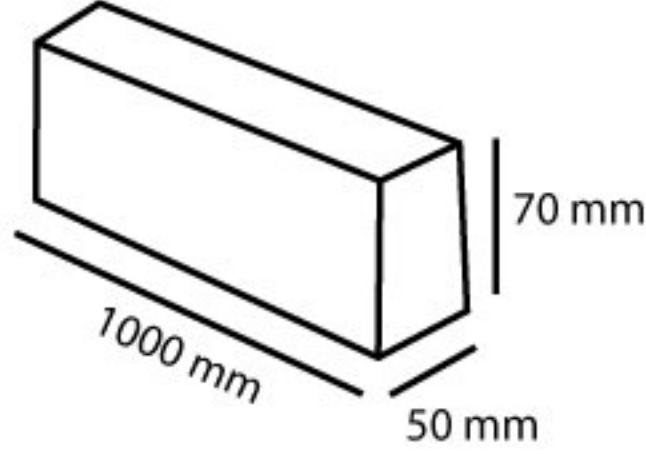

Teknik Özellikler

Gövde	: Alüminyum Profil
Tüketim	: 30 W
Renk Sıcaklığı	: 3000/4000/6500 K
Optik	: Opal Difüzör
Işık Kaynağı	: SMD LED
Giriş Gerilimi	: 220-240V AC 50/60 Hz
CRI	: >80
IP Sınıfı	: IP54
Işık Açısı	: 10-24 / 45-60

Technical Specifications

Body	: Aluminum Extrusion
Power	: 30 W
Color Temperature	: 3000/4000/6500 K
Optic	: Opal Diffuser
Light Source	: SMD LED
Input Voltage	: 220-240V AC 50/60 Hz
CRI	: >80
IP Class	: IP54
Beam Angel	: 10-24 / 45-60

Ek Özellikler

- DALI Uyumu
- DMX Kontrol
- Dim Edilebilir 1-10 V

Additional Features

- DALI Compliance
- DMX Control
- Can Be Dimmed 1-10 V

Kullanım Alanları

Ofis, Okul, Mağaza, Otel

Areas Of Usage

Office, School, Shops, Hotel



Ürün Kodu / Model No	B48-170-030XX
Ürün Tanımı / Description	BELLATRİX-30 W
Güç Tüketimi / Power	30 W
Boy / Size	1000 mm
Çalışma Sıcaklığı Operating Temperature Range (t _a)	-20 +50
Ağırlık (kg) / Weight (kg)	2